

DESCRIPTION

The diameter of this [Tea Roaster Machine](#) is 100cm, and the length of the inner straight section is 1250mm. Using 220V/380 voltage, it can process 15 kg of fresh leaves per batch.

Integrated microcomputer control system, the fixation time can be intelligently controlled, adopt dual temperature control design, ensure the precise control of temperature and ensure the quality of tea, when tea fixation, the speed of the machine can be adjusted, according to the tea of different producing areas, different speed can be adjusted.

Using 2.5mm ultra-thick steel plate, the temperature change is small and good heat preservation, the tea leaf will not be damaged, (other factory only use 1.6mm steel plate), preserve the design of the combustion head of the constant burning flame, reserve the constant burning flame after the ignition is successful, re-ignite from the constant burning flame, reduce the pressure of the ignition needle and the ignition coil, and improve the service life.

EXPLODED VIEW

洁力 1055000



Website: delijx.com Email: info@delijx.com
WhatsApp/ WeChat/ Tel: 0086-18120033767

①	Control Pannel	⑧	Heat Sink
②	Thermometer	⑨	Handle
③	Outer Barrel	⑩	Gearbox
④	Inner Barrel	□	Balance bolt
⑤	Support Wheel	□	Reduction cylinder
⑥	Ignition Switch	□	Combustion Zone
⑦	Bottom Wheel	□	Support Frame

ADVANTAGE

1. Alarm device, automatic alarm can be given at the end of the set time.

- 2. There is a handle on the drum, which can be manually roasting in case of a sudden power failure, so that the tea is not wasted.
- 3. Optimized deceleration system, the machine speed is stable, while ensuring that the torque is large enough and running smoothly.
- 4. The inner barrel uses a new type of environmentally friendly fireproof insulation material, thickness up to 20mm, greatly reduces heat loss and saves energy by 30%.
- 5. An exhaust fan is added to the rear, which can be turned on and off manually, which can quickly blow away the hot and humid air inside the machine to prevent the tea from being stuffy and affecting the taste.

APPLICATION

[Green Tea Roaster](#) is suitable for processing green / oolong / herbal tea, the following is the working time required for the above tea production.

Type Of Tea	Working Time
Green Tea	4-8 Minutes
Oolong Tea	4-8 Minutes
Herbal Tea	4-8 Minutes

The above data is for reference only, and the specific processing time shall be determined according to the actual situation.

SPECIFICATION



1. 功率 1.55kW

Tea Fixation Machine DL-6CST-100

Voltage : 220V / 380V

Power : 0.75 KW

Drum Diameter : 1000 mm

Drum Length : 1250 mm

For Green/Oolong/Yellow Tea

Gas Heating

Capacity 150 kg/h

2.5mm Steel Board



L:240cm W:133cm H:201cm

Website: delijx.com Email: Chois@delijx.com

WhatsApp/ WeChat/ Tel: 0086-18120033767

[Tea Roaster Machine](#) specification list:

Model		DL-6CST-100
Dimensions		1330×2400×2010 mm
Voltage		380/50 V/Hz
Drum inner diameter		1000 mm
Drum inner length		1250 mm
Drive motor	Power	0.75 KW
	Speed	1400 rpm
	Voltage	380 V
Exhaust fan	Power	85 W
	Speed	2200 rpm
	Voltage	220 V

Drum speed	5-37 rpm
Heating type	Liquid gas
Capacity per time	15 kg/time
Efficiency	150 kg/h

Specification of all of [Tea Steam Roaster](#).

Model	6CST-50	6CST-70	6CST-90	6CST-100
Drum Diameter	50 cm	70 cm	90 cm	100 cm
Drum Length	60 cm	100 cm	124 cm	125 cm
Capacity	25 kg/h	50 kg/h	100 kg/h	150 kg/h

If you have special need, it can be customized according to the needs of customers.


DETAILS




T-shaped combustion fire platoon covering the tea fixation barrel, burning area up to 100%.



The inner barrel uses a new type of environmentally friendly fireproof insulation material, thickness up to 20mm, greatly reduces heat loss and saves energy by 30%.

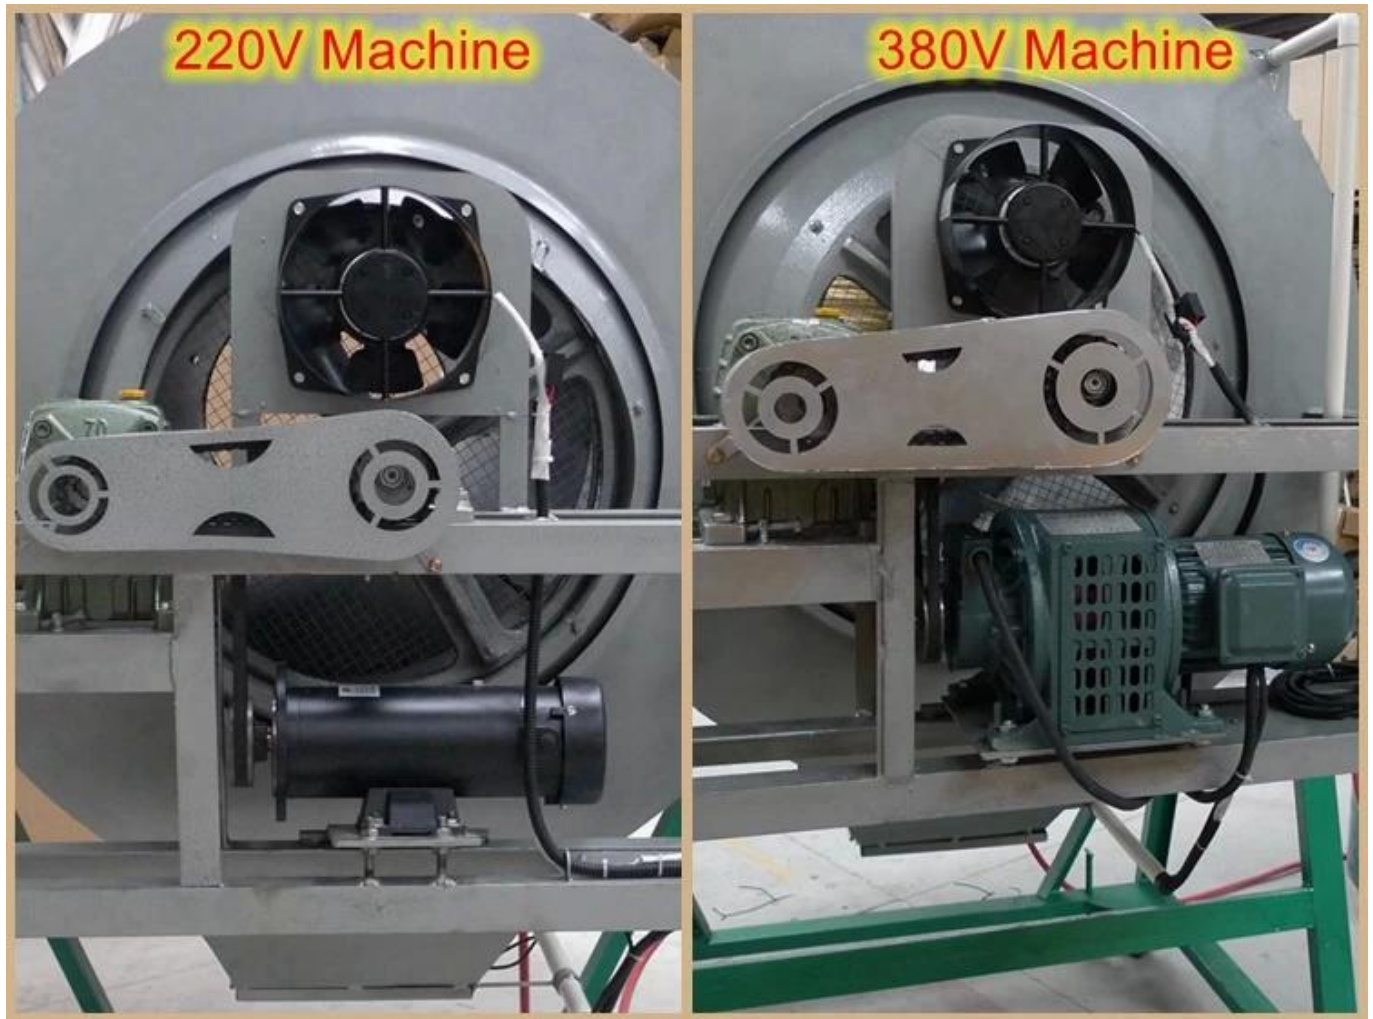

Optimized deceleration system, the machine speed is stable, while ensuring that the torque is large enough and running smoothly.

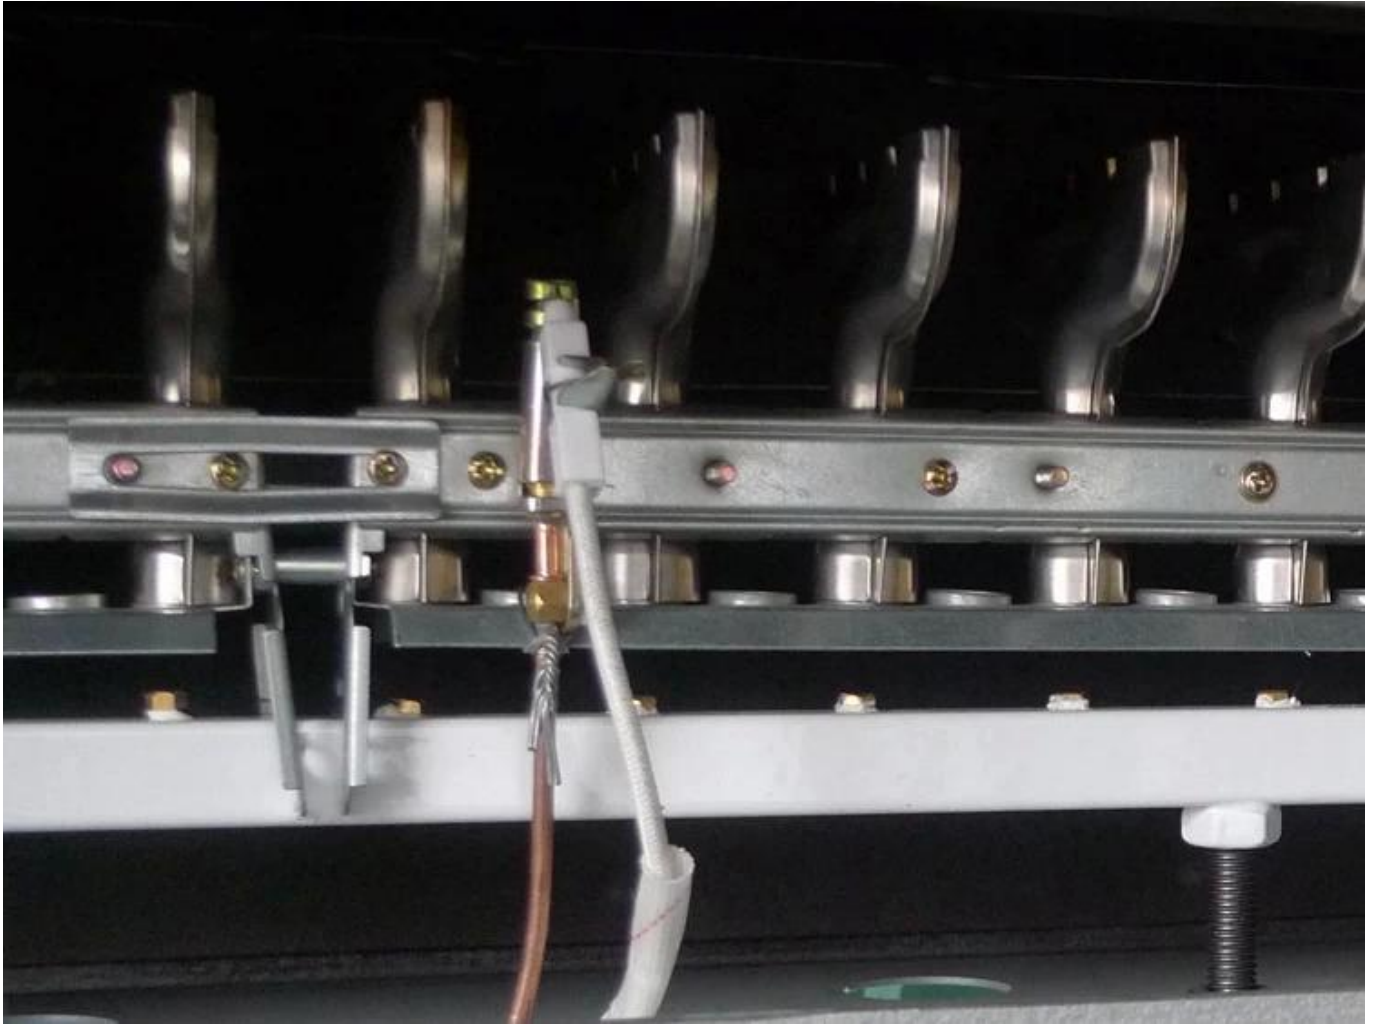

Preserve the design of the combustion head of the constant burning flame, reserve the constant burning flame after the ignition is successful, re-ignite from the constant burning flame, reduce the pressure of the ignition needle and the ignition coil, and improve the service life.



Using 2.5mm ultra-thick steel plate, the temperature change is small and good heat preservation, the tea leaf will not be damaged, (other factory only use 1.6mm steel plate)

PHOTOS







CONTACT

If you are interested in this product, please contact us to get the price.



↑ ↑ Click the icon to get the latest price directly ↑ ↑



Quanzhou Deli Agroforestril Machinery Co., Ltd.

12# Dongqing Road, Chengxiang Town,

Anxi County, Quanzhou, Fujian, China (Mainland)

WhatsApp / WeChat: 0086-18120033767

Email : info@delijx.com

Web: www.delijx.com

↓ ↓ You can also leave your contact information at the bottom.
We usually contact you in about 10 minutes ↓ ↓